


## Feature:

- Used in monitoring equipment, medical analysis, and engineering scheme.
- Easy to use and simple to install
- No monitor compatible issue.
- No PC required.
- No software required.
- Supports NTSC/ PAL systems (Auto-detect).
- Can receive signal input from AV and S-Video, and output signal by VGA output.
- Supports 16:9 wide screen LCD monitors.
- Can be used as the platforms of PS2 & X-BOX and make LCD compatible for PS2 and X-BOX. No lag!
- Supports 800x600, 1024x768, 1280x1024, and 1440x900 resolutions.
- 3D-motion adaptive de-interlacing technology enhances the quality of 2D dynamic images and 3D static images.
- Built-in Y/C separation makes the quality of pictures smoother; the usage of noise reduction circuit improves the quality of images inputted from AV as good as that inputted from S-Video.


## Specification:

Input	AV, S-Video
Resolution	800*600,1024*768,1280*1024,1440*900
Switch buttons	Power · Input Source · Resolution
OSD	Resolution · Input Source · TV system
Package contents	VGA Converter · AV · S-Video · Adapter(5V) · User manual


### 1 Right View

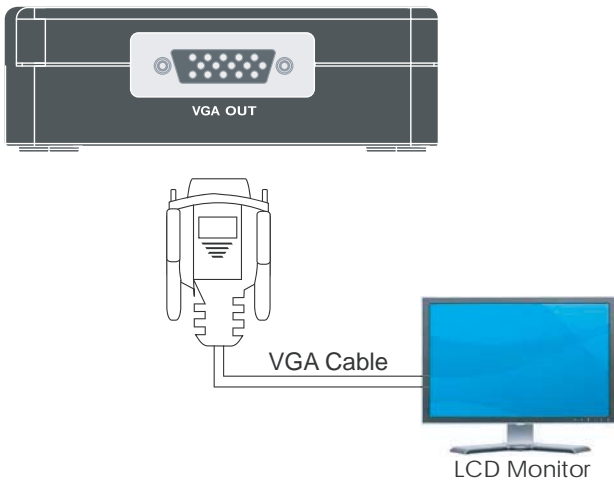

### 2 Rear View

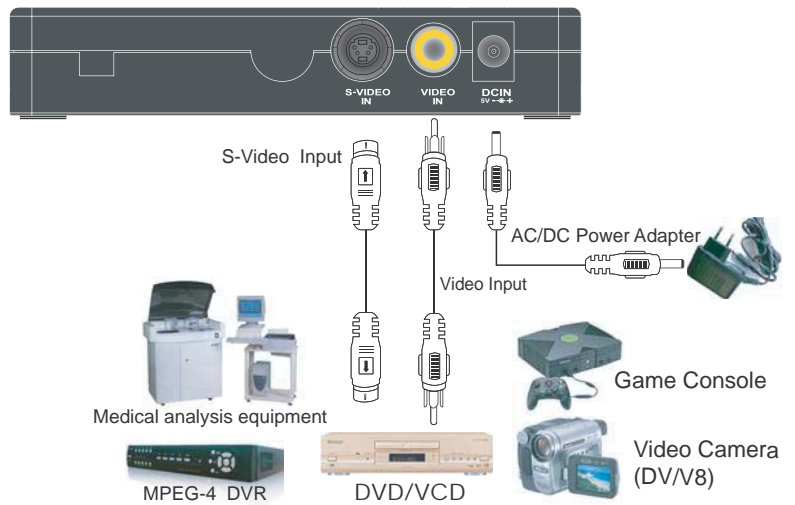

### 3 Front Panel

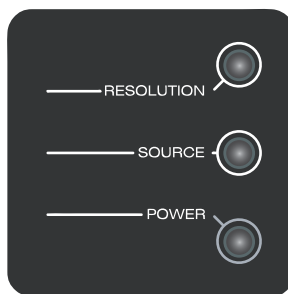

#### Resolution

Switch between 800x600 · 1024x768 · 1280x1024 · 1440x900

#### Source

Switch input source from video and s-video

#### Power

Turn on or turn off the power

# KGUARD SECURITY

#### Headquarter \_ Taipei, Taiwan

Address : 4F, No.113, Jian 2nd Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.)

TEL : 886-2-8228-6080 FAX : 866-2-8221-6857

Technical Support : service@kguard.com.tw

Sales inquiry : sales@kguard.com.tw

#### U.S.A. Branch Office

Address : 9780 Research Dr. Irvine CA 92618

TEL : 1-949-450-0052

FAX : 1-949-450-0053

Sales inquiry : usa@kguard.com